

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
17 March 2005 (17.03.2005)


PCT

(10) International Publication Number  
**WO 2005/025133 A1**

- (51) International Patent Classification<sup>7</sup>: **H04L 12/26** (SE). AXELSSON, Håkan [SE/SE]; Blodstenvägen 25, S-752 58 Uppsala (SE).
- (21) International Application Number: PCT/SE2003/001392 (74) Agent: ERICSSON AB; Patent Unit Core Networks, Telefonplan/Ålvsjö, S-126 25 Stockholm (SE).
- (22) International Filing Date: 5 September 2003 (05.09.2003) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-164 83 Stockholm (SE). (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ...)
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): EKSTRÖM, Bo [SE/SE]; Kommendörsgatan 25, S-114 48 Stockholm

[Continued on next page]

(54) Title: MONITORING IN A TELECOMMUNICATION NETWORK

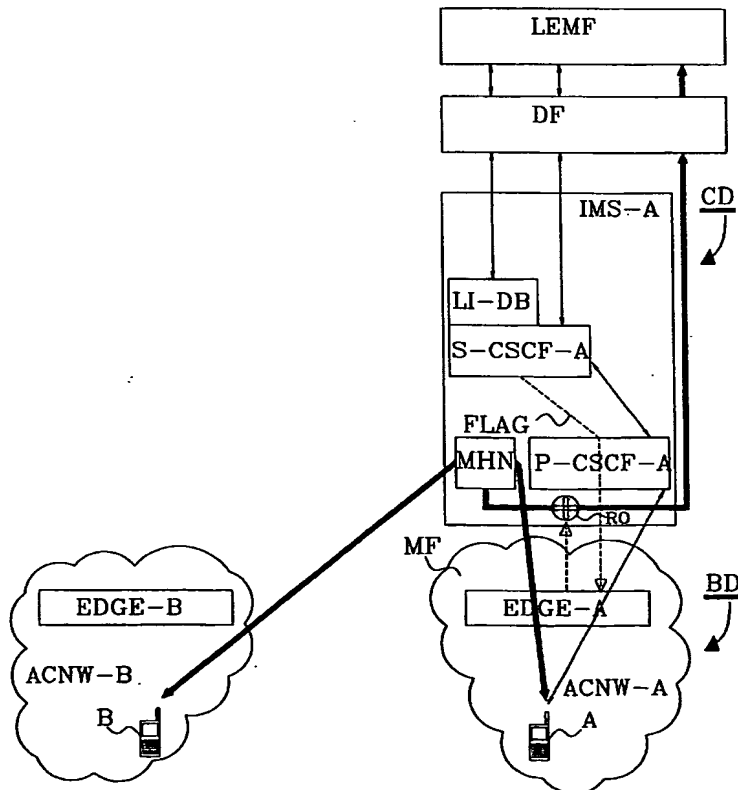

(57) Abstract: The present invention relates to a method for monitoring media flow in a telecommunication network. The network comprises a media-handling node (MHN) through which, sessions between subscribers are transported via first ports (PI1-PI5) and second ports (PO1-PO5). An extra port (XP1-XP5) is assigned to the media-handling node (MHN) for each new session that is transported through the node. The method comprises the following steps: storing in a database (LI-DB), identification of a first subscriber (A) for which monitoring is desired; a connection is set-up between the first subscriber (A) and second subscriber (B); an assigned extra port (XP1) that is adherent to the session between the first and second subscriber (A, B) is connected; the session between the first and second subscriber is monitored via the connected extra port (XP1).

WO 2005/025133 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*